


Technical Bulletin 121 - Activation Flow Rates at Higher Temperatures

The following dipswitch can be adjusted to optimize water flow activation rate when used in the following type applications and the water heater temperature set point is greater than 135°F. The compatible models of tankless water heaters include the following series: VC, KB, KBD, KBP, KCM

- High inlet (ground) water temperature
- Hydronic applications
- Hot water recirculation

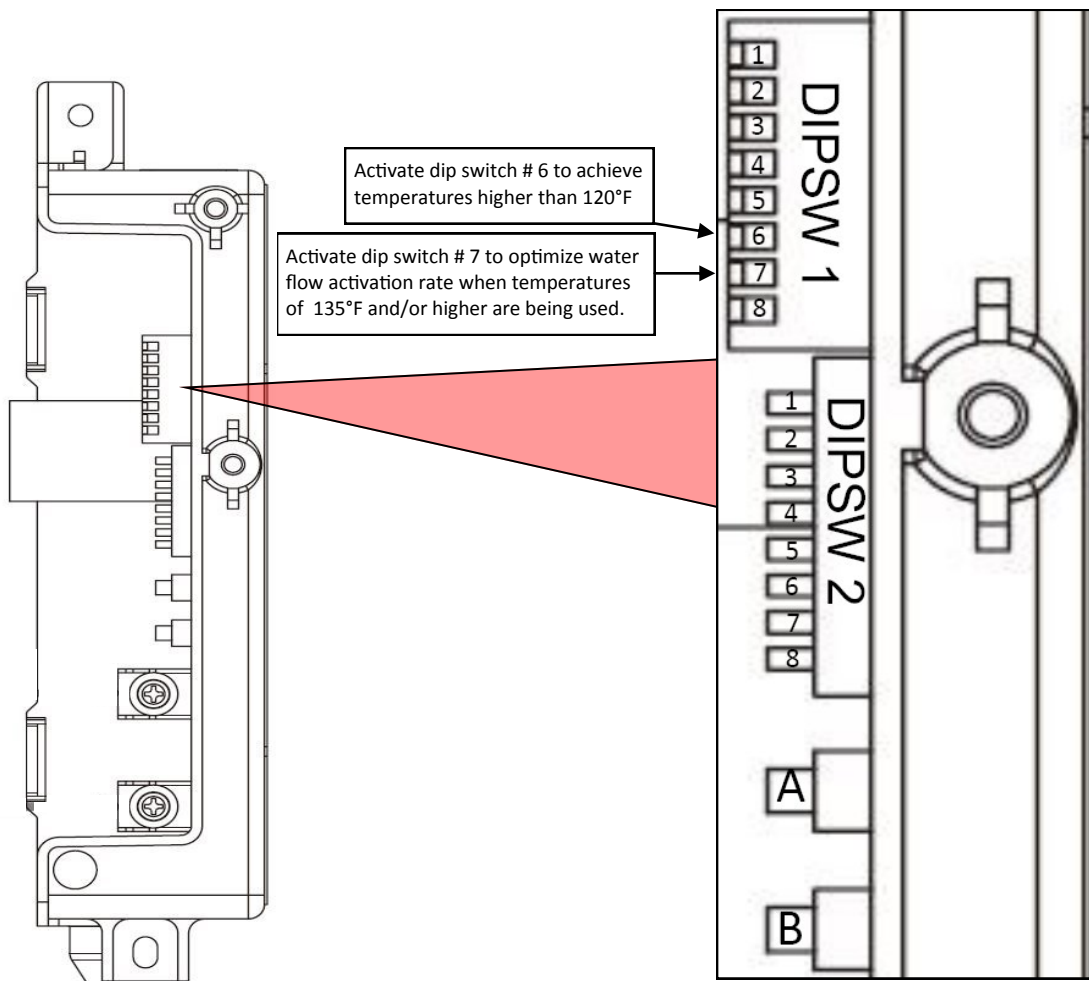

WARNING

Water temperature above 120°F (49° C) can cause serious injury. Mixing valve temperature setting should be done by licensed contractor per local code requirement. To ensure correct temperature control, use water thermometer at faucet outlet.

Rinnai America Corporation • 103 International Drive, Peachtree City, GA 30269

Toll-Free: 1-800-621-9419 • Phone: 678-829-1700 • www.rinnai.us

©2015 Rinnai America Corporation. Rinnai America Corporation continually updates materials, and as such, content is subject to change without notice. Local, state, provincial, federal and national fuel gas codes must be adhered to prior to and upon installation.