

## Technical Bulletin 101-Code 79 Sensing Element

---

In applications where excessive moisture is present in the environment, condensate may form at the bottom of the unit causing nuisance code 79s (Leak Detection). In such applications it may be necessary to install a modified sensing element to eliminate the nuisance codes.




Modified Sensing Element



Factory Sensing Element

1. Disconnect electrical power supply.
2. Turn off gas supply.
3. Remove 4 screws securing the front panel. Remove front panel. For indoor units, remove the controller bracket.
4. Locate leak sensing element at bottom of unit .
5. Remove 1 screw (sensing element) from sensor bracket.
6. Install 1 screw (shorter sensing element) into sensor bracket.
7. For indoor units install controller bracket. Install front panel using 4 screws to secure it.
8. Turn on gas supply.
9. Connect electrical power supply
10. Test unit.

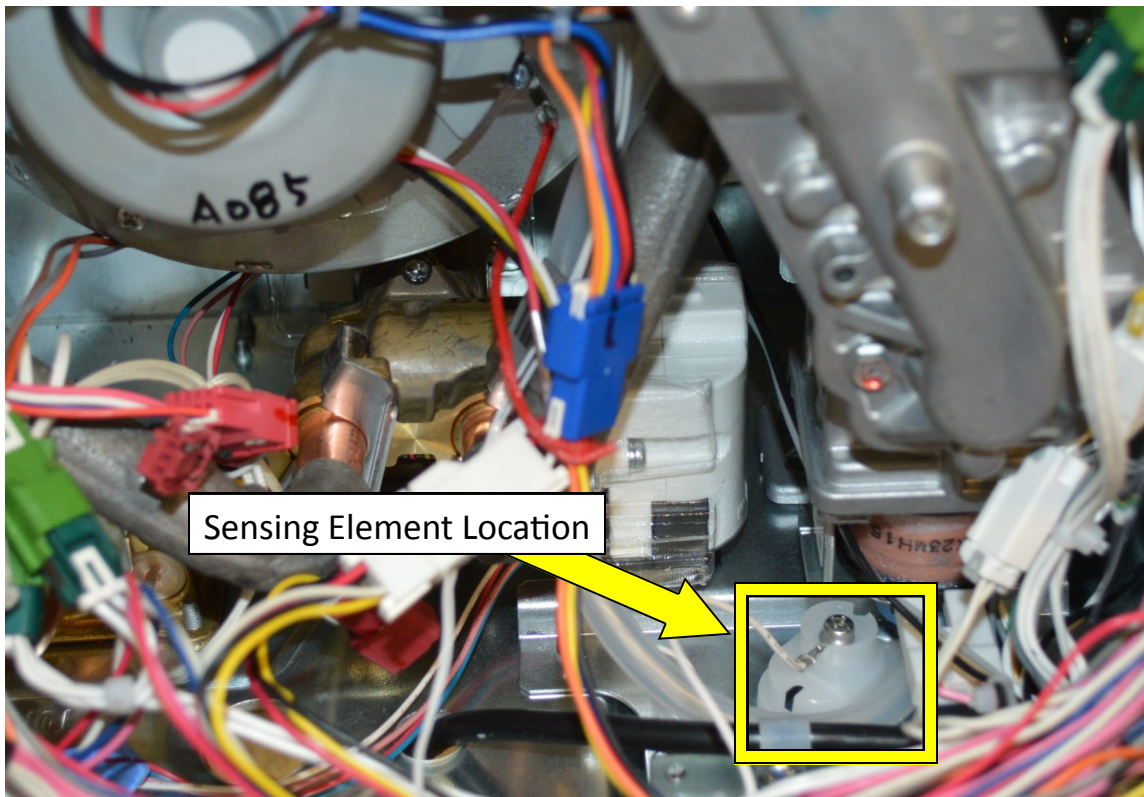

Rinnai America Corporation • 103 International Drive, Peachtree City, GA 30269

Toll-Free: 1-800-621-9419 • Phone: 678-829-1700 • [www.rinnai.us](http://www.rinnai.us)

©2013 Rinnai America Corporation. Rinnai is continually updating and improving products; therefore, specifications are subject to change without prior notice. Local, state, provincial and federal and national fuel gas codes must be adhered to prior to and upon installation.