


Type of Appliance	Temperature controlled, continuous flow, gas hot water system
Rinnai Model Number	REU-VA2528FFUD
Operation / Exhaust System	Forced combustion / Direct vent
Minimum/Maximum Gas Rate (Input)	15,000 - 199,000 BTU/h (Natural Gas) 15,000 - 190,000 BTU/h (Propane)
Electrical	Appliance: AC 120 Volts - 60 Hz Controller: DC 12 Volts
Electrical Consumption	Normal 79 watts Standby 2.8 watts Anti-frost protection 100 watts
Ignition System	Direct electronic ignition
Hot Water Capacity	0.6 to 7.5 GPM (35° F rise)
Temperature	98° - 140° F (98° - 160° F available with the MCC-91 controller for commercial and hydronic applications)
Temperature (without remote)	120° F (factory default)
Approved Gas Types	Natural or Propane (ensure unit matches gas type)
Installation	Indoor only
Energy Factor	Natural Gas: 0.81 Propane: 0.81
Thermal Efficiency	Natural Gas: 84% Propane: 84%
Service Connections	Gas supply: 3/4 inch MNPT Cold water inlet: 3/4 inch MNPT Hot water outlet: 3/4 inch MNPT
Water Flow Control	Water flow sensor, electronic water control device and fixed by-pass
Minimum/Maximum Water Supply Pressure	20 - 150 PSI (50 PSI or above is recommended for maximum flow)

FLOW TABLE

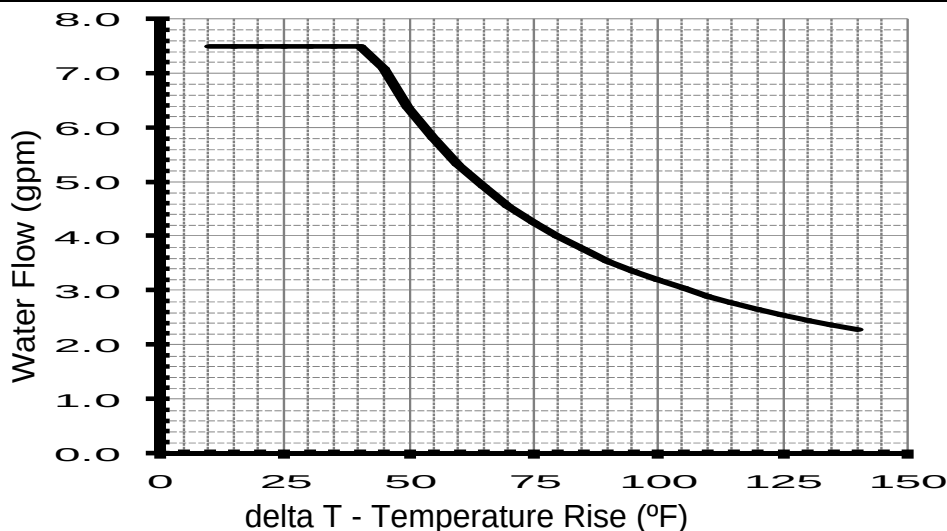

Water Temperature Control	Simulation feed forward and feedback
Controller	MC-91-1US (part of the front panel) Deluxe controller: MC-100V-1US (optional) Bathroom controller: BC-100V-1US (optional) MCC-91-1US (for commercial applications)
Controller Cable	Non-polarized two-core cable, minimum 22 AWG
Safety Devices	• Flame failure - Flame Rod • Boiling protection • Combustion fan rpm check • Over current - glass fuse (3 amp) • Remaining flame (OHS) • Thermal fuse • Automatic frost protection
Clearances from Combustibles (suitable for closet, attic, and crawl space installations)	• Top of heater - 6 inches • Front of heater - 6 inches • Sides of heater - 2 inches
Clearances from Non-combustibles	• Top of heater - 2 inches • Front of heater - 6 inches • Sides of heater - 1/2 inch • Back of heater - 0 inches • Bottom of heater - 12 inches • From vent pipe - 0 inches
Min. / Max. Gas Supply Pressure	Natural Gas: min 5" W.C. max 10.5" W.C. Propane Gas: min 8" W.C. max 13.5" W.C.
Manifold Gas Pressure (inches W.C.)	Natural Gas: high fire 2.7" W.C. low fire 0.52" W.C. Propane Gas: high fire 4.4" W.C. low fire 0.92" W.C.
NOx	Meets California and Texas NOx Emission Rules
Warranty	Heat exchanger: 12 years* for residential and 5 years* for commercial and hydronic applications; (10 years* if used with the Rinnai Hydronic Air Handler); all other parts 5 years*; labor 1 year; (* 3 years if used as a circulating water heater within a circulation loop, when the water heater is in series with a circulation system and all circulating water flows through the water heater)

Rinnai is continually updating and improving products; therefore, specifications are subject to change without prior notice. Local, state, provincial and federal codes must be adhered to prior to installation.

