




I-Series Plus Heat-Only (Solo) Boiler

Models: IP060S, IP090S, IP120S, IP150S

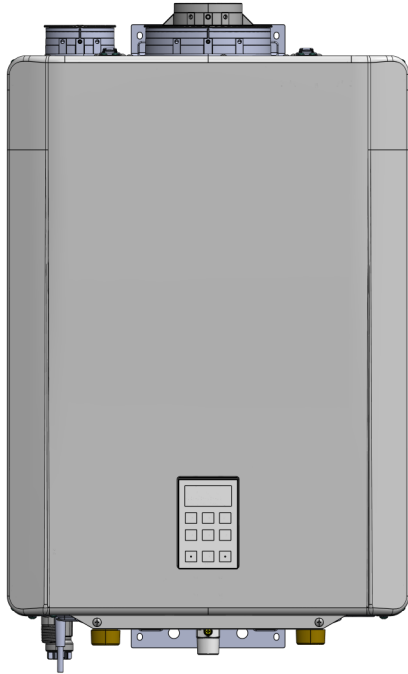

CERTIFIED TO ANSI Z21.13 — CSA 4.9

CONDENSING WALL-MOUNTED, GAS-FIRED HEAT-ONLY (SOLO) BOILER

Models	IP060S, IP090S, IP120S, IP150S
AFUE	Up to 96%
Appliance	Wall-Mounted, Gas-Fired Heat-Only (Solo) Boiler
Installation	Indoor
Gas Types	Natural Gas (or Propane with field conversion)

Standard Features	<ul style="list-style-type: none"> Outdoor Reset Control System with Sensor Modulating Wire Mesh Burner Stainless Steel Water Tube Condensing Heat Exchanger Direct Vent Sealed Combustion Approved for Room and Closet Installations
--------------------------	--

Included with Purchase	<ul style="list-style-type: none"> Condensing Gas Boiler Wall Mounting Bracket CH Pressure Relief Valve (30 PSI) Outdoor Temperature Sensor Vent Top with Integrated 2 in. PVC or 3 in. x 5 in. Concentric Vent Adapter Documentation: Installation and Operation Manual, User Manual
-------------------------------	---

Optional Accessories	Primary-Secondary Heating Kit (PN: 807000213), Condensate Neutralizer (PN: 804000074), ScaleCutter (PN: 103000038), and ScaleCutter Refill Cartridge (PN: 103000039).
-----------------------------	---

Venting Options	<ul style="list-style-type: none"> Direct Vent (Concentric and Twin Pipe) Room Air Ubbink Flex Vent Materials: Polypropylene, Stainless Steel, PVC, CPVC <p>Refer to the Boiler Installation and Operation Manual for approved venting.</p>
------------------------	---

Maximum Equivalent Vent Lengths:

Concentric, Twin Pipe, and Room Air:

Vent Sizes	<ul style="list-style-type: none"> 2 in. PVC 2 in. (60 mm) PP 2 in. x 4 in. Concentric 	<ul style="list-style-type: none"> 3 in. PVC 3 in. (80 mm) PP 3 in. x 5 in. Concentric
Vent Lengths	75 ft (23 m)	160 ft (49 m)

Flex:


Vent Sizes	2 in. PP
Vent Lengths	50 ft (15 m)

For detailed venting information, refer to the Boiler Installation and Operation Manual.


DIMENSIONS

Measurements: in. (mm)


FRONT

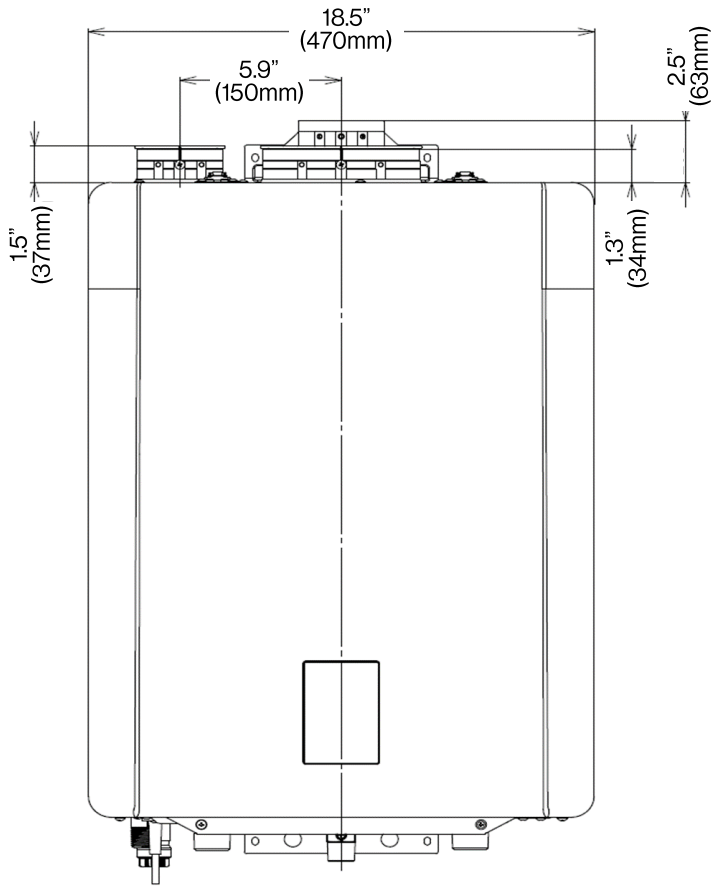

SIDE

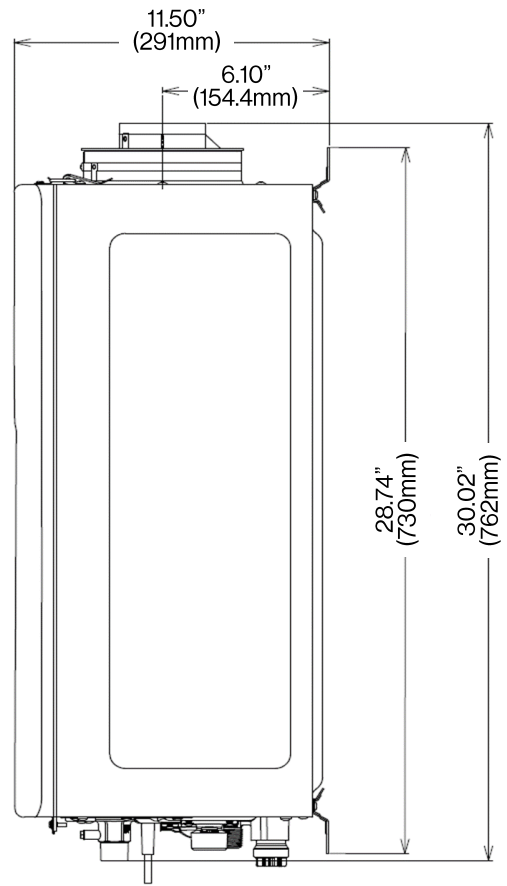

BOTTOM

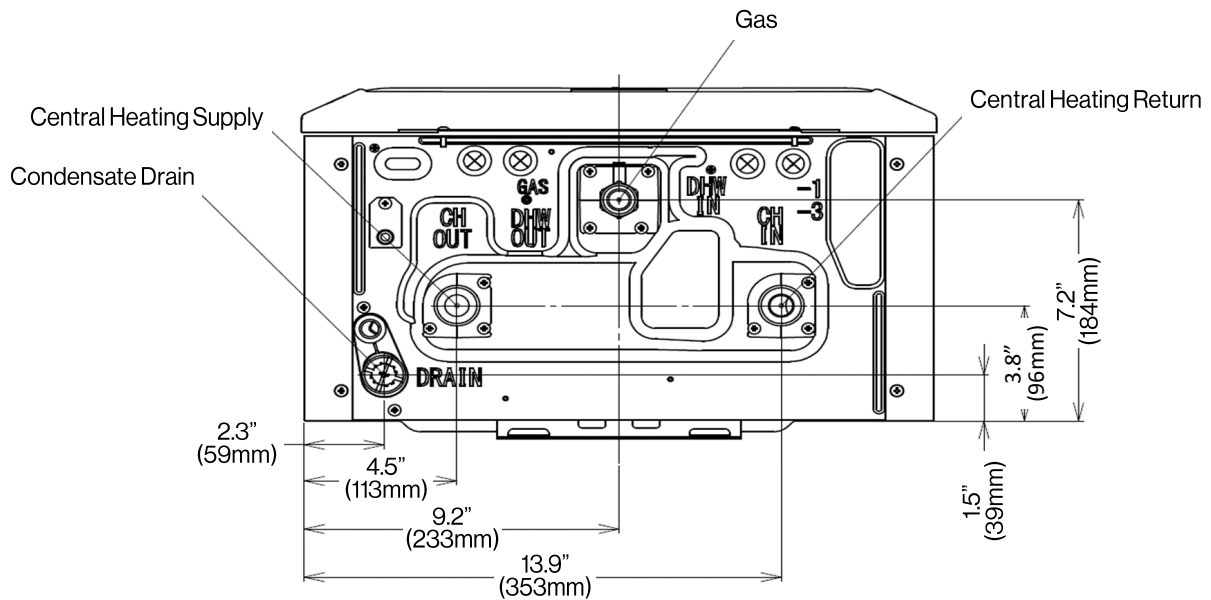


TECHNICAL SPECIFICATIONS

Model		IP060S	IP090S	IP120S	IP150S
Dimensions - w, h, d	Unit	18.5 in. x 26.4 in. x 11.45 in. (471 mm x 671 mm x 290 mm)			
	Shipping	20.9 in. x 33.5 in. x 14.6 in. (532 mm x 852 mm x 370 mm)			
Weight	Unit	62.6 lb (28.4 kg)		64.8 lb (29.4 kg)	
	Shipping	69.1 lb (31.4 kg)		71.3 lb (32.4 kg)	
Ignition System		Direct Electronic Ignition			
Heat Exchanger Surface Area		9.3 sq ft		10.9 sq ft	
Gas Consumption (Btu/hr)	Minimum	15,000			
	Maximum	60,000	90,000	120,000	150,000
Heating Capacity (MBH)		56	83	110	138
Temperature Setting (CH)		(Min - Max) 86°F - 180°F (30°C - 82°C)			
Water Content		0.75 gal		0.88 gal	
Water Supply Pressure	CH	Minimum: 13 PSI (90 kPa) Maximum: 45 PSI (310 kPa) Recommended: 17 - 26 PSI (117 - 180 kPa)			
	Pressure Relief Valve	30 PSI (207 kPa)			
Sound Level		40 dB(A)			42 dB(A)
Electrical Data	Normal (CH)	36 W	53 W	50 W	50 W
	Standby	8 W			
	Max Current	14 Amps			
	Fuse	10 Amps x1, 4 Amps x5			
Turndown Ratio (TDR)		4.0:1	6.0:1	8.0:1	10.0:1
AFUE		95.5%	96.0%		
Gas Supply Pressure ¹	Natural Gas	3.5 in. - 10.5 in. W.C. (0.87 - 2.61 kPa)			
	Propane	8.0 in. - 13.5 in. W.C. (1.99 - 3.36 kPa)			
Electric Connections		AC 120 Volts, 60 Hz			
Certifications		ANSI Z21.13, CSA 4.9, ASME			

¹Maximum gas supply pressure must not exceed the value specified by the manufacturer.

PRESSURE DROP CURVE AND WATER FLOW CURVE

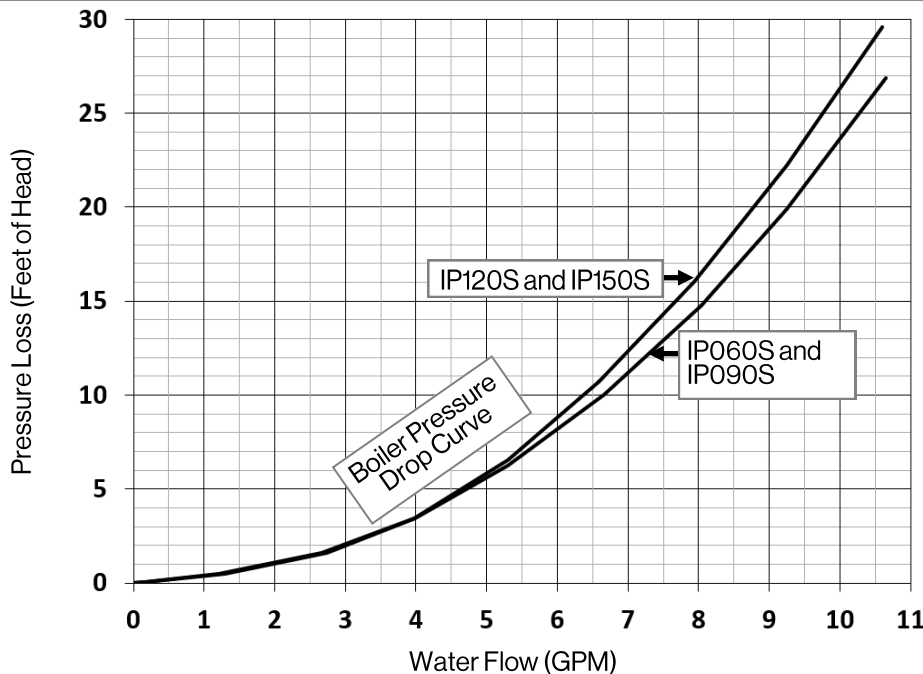

FEATURES

Faster, Easier Installation

- Compact & lightweight design
- Convenient mounting bracket
- NPT threads for connection points
- More flexible venting options
- Simplified parameters for commissioning and setup

Clearances

- Top: 2 in. (51 mm)*
- Bottom: 12 in. (305 mm)
- Front: 6 in. (152 mm)**
- Back: 0 in.
- Sides: 2 in. (51 mm)
- Vent: 0 in.

* 0 in. from vent components.
6 in. (152 mm) for closet installations.

** Clearance for servicing is 24 in. (610 mm) in front of boiler.

Warranty

Residential:

- Heat Exchanger: 12 Years
- All Other Parts/Components: 5 Years
- Labor: 1 Year

Commercial:

- Heat Exchanger: 5 Years
- All Other Parts/Components: 5 Years
- Labor: 1 Year

Important

If the boiler is to be installed in a system that has multiple zones, a Closely Spaced Tee/Manifold Kit (**PN: 807000213**) is recommended to be installed.

CH = Central Heating
PRV = Pressure Relief Valve

©2024 Rinnai America Corporation. Rinnai America Corporation continually updates materials, and as such, content is subject to change without notice. Local, state, provincial, federal and national fuel gas codes must be adhered to prior to and upon installation.