


# Primary-Secondary Heating Kit

FOR I-SERIES AND I-SERIES PLUS HEAT-ONLY (SOLO) BOILERS

### **SPECIFICATIONS**

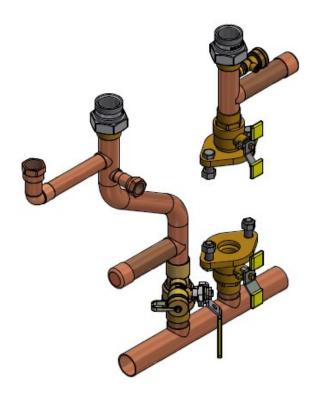

**Closely Spaced Tee** 

PRIMARY-SECONDARY HEATING KIT	
Rinnai Part Number	807000213
Applicable Boiler Models	Heat-Only (Solo) Models: i060S, i090S, i120S, i150s, IP060S, IP090S, IP120S, IP150S, IP175S, IP199S
Material	Type L Copper

#### **BENEFITS**


- Factory-built for quick field installation
- Designed specifically for Rinnai I-Series Boilers
- Offered as a boiler accessory for hydraulic separation
- Small footprint for easy installation
- Compact and lightweight (7.0 lb / 3.2 kg)

#### **HYDRAULIC SEPARATION**

A closely spaced tee is a hydraulic separator that separates the boiler loop from the central heating loop. Hydraulic separators allow for no pump curve matching or flow calculation and is ideal for multi-temperature and multi-zone systems. Examples include:

- Systems with high pressure drops
- Systems with high flow demands
- Systems with zone circulators
- Large zoned systems

#### **CONNECTIONS**

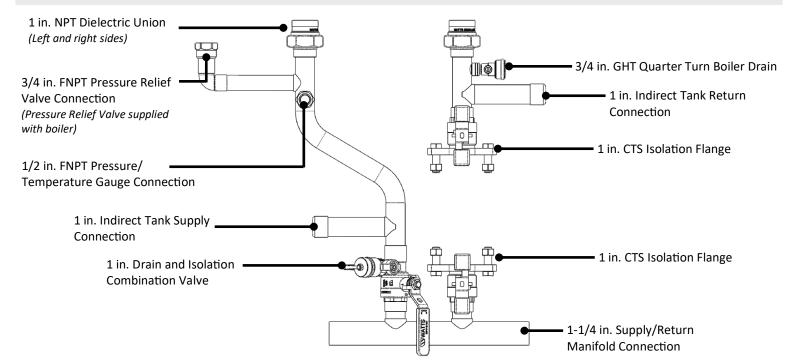

## **DIMENSIONS AND WEIGHT WEIGHT** SIDE **FRONT** 7.0 lb (3.2 kg) 1 in. NPT DIELECTRIC UNION CONNECTION 9.449 in. (240 mm) 5.93 in. (151 mm) (QTY 2) 3/4 in. GHT BG-QT DRAIN 3/4 in. FNPT 1 in. CTS ISOLATION FLANGE 1 in. CTS COPPER 1/2 in. FNPT 19.49 in. 6.6 in. (495 mm) (168 mm)

1 in. CTS ISOLATION FLANGE

1-1/4 in. CTS COPPER

## SYSTEM APPLICATION EXAMPLE

1 in. CTS COPPER

4 in. (102 mm)

12 in. (305 mm)

20.05 in. (509 mm)

